

内置升压带防破音功能的2x9W D类及AB类音频功率放大器

2x9W Boosted Class D and Class AB Audio Amplifier

■ FEATURES

- Anti-Clipping Function (ACF)
 - Filter-less Modulation, Eliminating Output Filter
 - Output Power
2x9W ($V_{BAT}=4V$, $R_L=4\Omega$, $THD+N=10\%$, $f_{IN} = 1kHz$)
 - Power Supply V_{BAT} : 2.7V~5.5V
 - High Efficiency Boost Converter
 - Force boost converter
 - Adjustable switch peak current limit to avoid over-pulling on battery current
 - Class AB / Class D
 - Over Current Protection, Thermal Protection, Low voltage malfunction prevention function included
 - Pb-Free Packages, ETSSOP20
- 防削顶失真功能(防破音, Anti-Clipping Function, ACF)
 - 免滤波器数字调制, 直接驱动扬声器
 - 输出功率
2x9W ($V_{BAT}=4V$, $R_L=4\Omega$, $THD+N=10\%$, $f_{IN} = 1kHz$)
 - V_{BAT} 供电范围: 2.7V至5.5V
 - 高效升压功能
 - 可调节最大限流值, 有效防止电池拉死
 - AB/D类可切换
 - 保护功能:过流/过热/欠压异常保护功能
 - 无铅封装, ETSSOP20

■ APPLICATIONS

- Bluetooth/Wi-Fi Speakers
- Portable Speakers
- Smart speakers
- Smart Home
- 蓝牙/ Wi-Fi音箱
- 便携式音箱
- 智能音箱
- 智能家居

■ DESCRIPTION

HTA8672, integrated with boost converter, is a stereo Class D audio amplifier that drives up to continuous 2x9W (10% THD+N, 1kHz) into 4ohm speaker from a Li-battery voltage. It also integrates Class AB amplifier.

The built-in boost converter generates a Class D amplifier supply rail with a max voltage of 8.5V or 7.5V.

HTA8672 features Anti-Clipping Function (ACF) which detects output signal clip due to the over input signal and suppresses the output signal clip automatically. Also, the ACF function can adapt the output clip caused by power supply voltage down with battery. It can significantly improve the sound quality, creating a very comfortable musical enjoyment, and to protect the speakers from overload damage. It also supplies ACF OFF mode.

Class AB amplifier mode is also available for HTA8672. Once the EMI Interference from class D and Boost Converter becomes an annoying problem, HTA8672 can be changed into Class AB mode.

HTA8672 has a filter-less modulation circuit which directly drives speakers while realizes low distortion and low noise characteristics. Thanks to filter-less, circuit design with fewer external parts can be made in portable applications.

As for protection function, over current protection function for speaker output terminals, over temperature protection function are also prepared.

HTA8672是一款内置升压的双声道D类音频功率放大器，由锂电池供电时，THD+N=10%、1kHz信号条件下，能连续输出2x9W功率（4Ω负载）；另外，其还支持AB类模式。

HTA8672内置的升压，提供8.5V和7.5V两档最大输出电压。


HTA8672的最大特点是防削顶失真（ACF）输出控制功能，可检测并抑制由于输入音乐、语音信号幅度过大所引起的输出信号削顶失真（破音），也能自适应地防止在BOOST升压电压下降所造成的输出削顶，显著提高音质，创造非常舒适的听音享受，并保护扬声器免受过载损坏。HTA8672还提供ACF-Off 模式。

HTA8672具有AB类和D类的自由切换功能，在受到D类功放EMI干扰困扰时，可随时切换至AB类音频功放模式。

HTA8672内部集成免滤波器数字调制技术，能够直接驱动扬声器，并最大程度减小脉冲输出信号的失真和噪音。输出无需滤波网络，极少的外部元器件节省了系统空间和成本，是便携式应用的理想选择。

此外，HTA8672集成了输出端过流保护、片内过温保护等功能。

TYPICAL APPLICATION

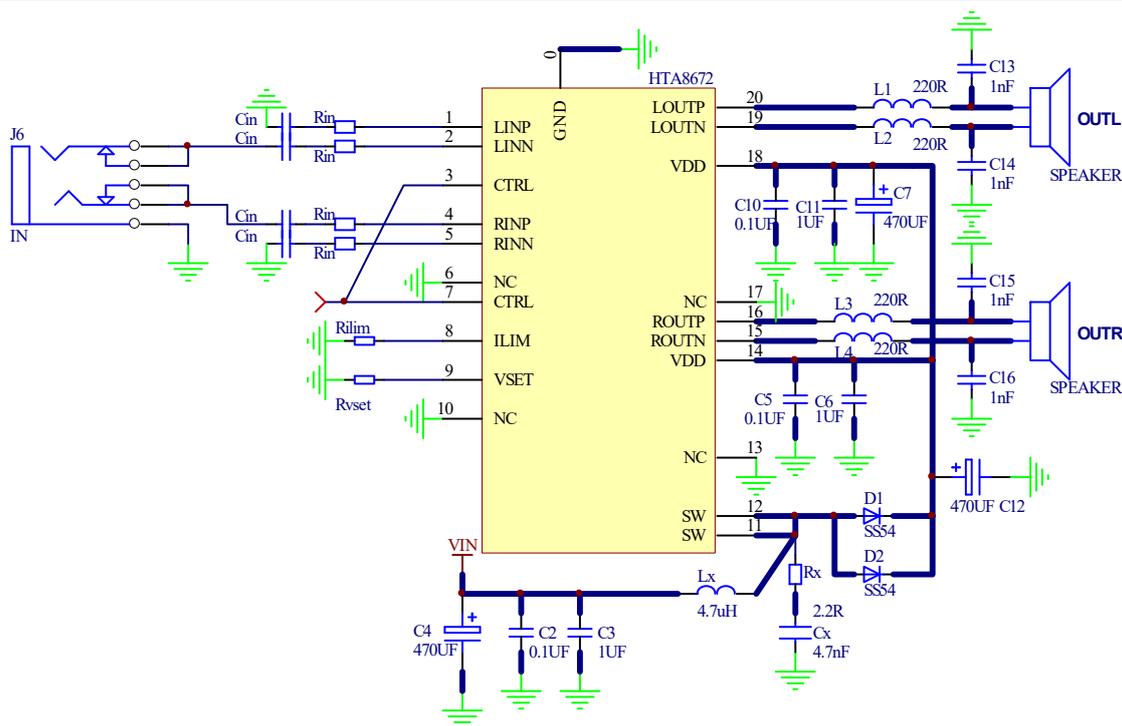

1. ILIM 脚设置升压电感的峰值电流限值，RILIM 电阻设置应不小于 120K.

R _{ILIM} 电阻值	升压电感的峰值电流限值
330k	3A
200k	5A
150k	6.6A
130k	7.7A
120k	8A

2. 系统增益设置

D类增益	D类时芯片内部输入电阻 RI与反馈电阻RF	AB类增益	AB类时芯片内部输入电阻 RI与反馈电阻RF
23.5倍 (27.4dB)	RF = 470k, RI = 20k	11.75倍 (21.4dB)	RF = 235k, RI = 20k

外部增加输入电阻 R_{IN}时，增益 (dB) = $20 \times \log \frac{RF}{R_{IN} + R_I}$

3. 最大升压设置

VSET	升压值
NC	8.5V
GND	7.5V

4. CTRL 脚设置芯片的工作模式

CTRL pin	工作模式
>2.4V	Class D, ACF off
1.5~2.1V	Class D, ACF on
0.9~1.3V	Class AB, ACF off
<0.2V	Shutdown

5. 为减小 SW 毛刺和辐射，SW 端建议预留 R_x+C_x ($2.2R+4.7nF$)到地的网络。

6. 电感选择：推荐使用 4.7uH 电感，饱和电流应大于设置的 ILIM 值。

7. 二极管选择：反向电压 V_R 推荐 > 15V，额定电流 I_F 推荐 > 最高升压值/负载电阻值，推荐使用 2 个 SS54。


8. PVDD 电容：一般的，为保证低频的功率，在靠近二极管的输出电压处放置 2 组 0.1uF//1uF//470uF，并尽可能靠近 VDD 且使用粗走线连接。

9. 辐射和传导是关注项时，输出建议预留 LC 滤波器，即 L1/L2/L3/L4 改成电感 10uH，C13/C14C15/C16 改成电容 0.68uF。


ORDERING INFORMATION

Part Number	Package Type	Package Abbr.	Eco Plan	MSL Level	Marking	Shipping Package / MOQ
HTA8672MTER	ETSSOP20	MTE	RoHS	MSL3	HTA8672 YYYMAAB ¹	Tape and Reel (R) / 3000pcs


Ordering Number

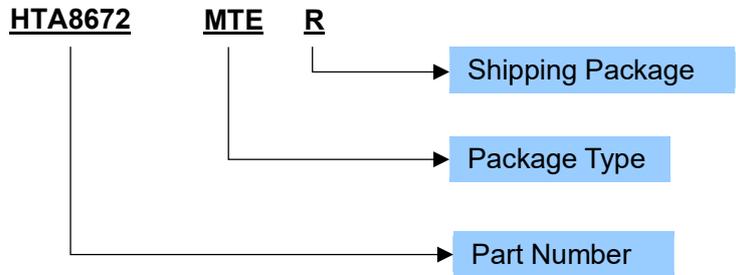

Production Tracking Code

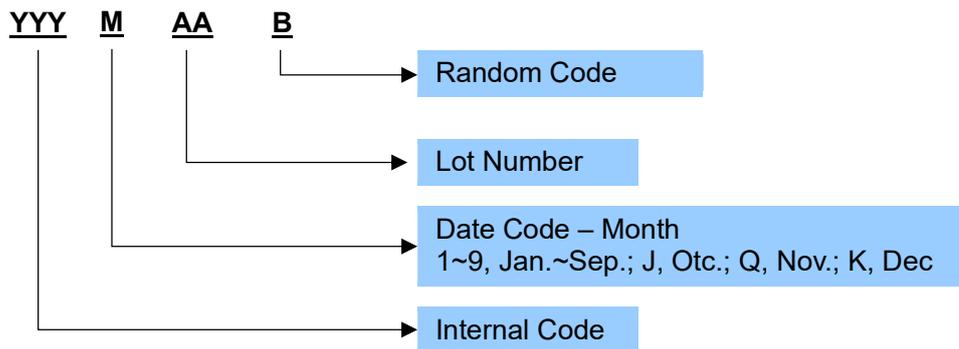

¹ YYYMAAB is production tracking code
Copyright©2025, Heroic Technology

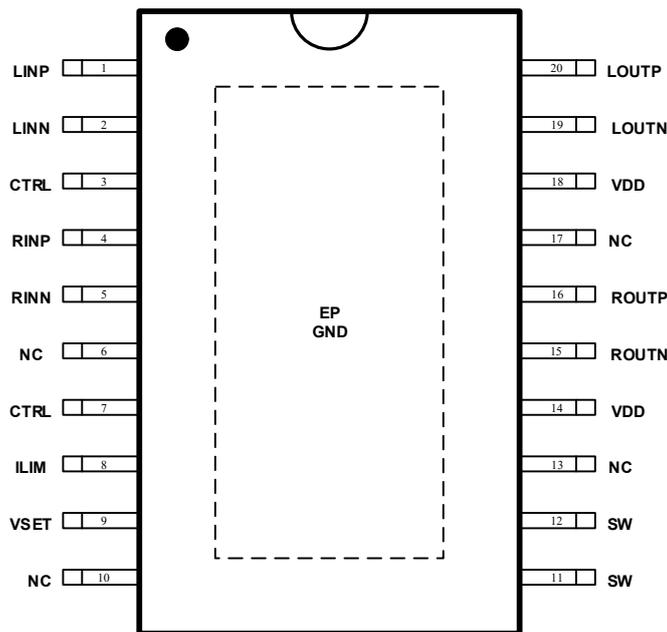■ TERMINAL CONFIGURATION


Top View

■ TERMINAL FUNCTION

Terminal No.	Name	I/O ¹	Description
1	LINP	I	Positive input (differential+) for L audio amplifier. L通道输入正端
2	LINN	I	Negative input (differential-) for L audio amplifier. L通道输入负端
3、7	CTRL	I	Mode Control Terminal. 模式控制脚
4	RINP	I	Positive input (differential+) for R audio amplifier. R通道输入正端
5	RINN	I	Negative input (differential-) for R audio amplifier. R通道输入负端
8	ILIM	I	Adjustable switch peak current limit. An external resistor should be connected between this pin and GND. 最大限流值设置端, 外部接电阻到地。
9	VSET	I	Max boost voltage set. 最大升压值设置
11、12	SW	I	Boost and rectifying switch input. 升压整流开关输入端
14、18	VDD	P	Power Supply for internal power circuitry. 电源
15	ROUTN	O	Negative pin for differential R speaker amplifier. R通道输出负端
16	ROUPT	O	Positive pin for differential R speaker amplifier. R通道输出正端
19	LOU TN	O	Negative pin for differential L speaker amplifier. L通道输出负端
20	LOU TP	O	Positive pin for differential L speaker amplifier. L通道输出正端
6、10、13、17	NC		NC. NC管脚, 可接地
EP	GND	G	Ground. 地

¹ I: Input; O: Output; G: Ground; P: Power;

■ SPECIFICATIONS¹

● Absolute Maximum Ratings²

Item	Symbol	Min.	Max.	Unit
Supply voltage range	V _{BAT}	-0.3	5.5	V
Input terminal voltage range	V _{IN}	-0.3	V _{DD} +0.3	V
Operating Ambient Temperature	T _A	-40	85	°C
Junction Temperature	T _J	-40	150	°C
Storage Temperature	T _{STG}	-50	150	°C

● Recommended Operating Condition

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
Supply voltage range	V _{BAT}		2.7		5.5	V
Operating Ambient Temperature	T _a		-40	25	85	°C
Speaker Impedance	R _L		3	4		Ω

● Electrical Specification³

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
BOOST Converter						
Boost converter output voltage	V _{DD}	VSET=NC		8.5		V
		VSET=GND		7.5		V
Boost converter frequency	f _{sw}			300		kHz

¹ Depending on parts and PCB layout, characteristics may be changed.

² Absolute Maximum Ratings is values which must not be exceeded to guarantee device reliability. With a system in which supply voltage might exceed supply voltage of PVDD/GND, external diodes are recommended to be used to assure that the voltage does not exceed the absolute maximum rating

³ Depending on parts and pattern layout, characteristics may be changed.

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit	
Class D Channel $V_{SS}=0V$, $V_{BAT}=4V$, $R_{IILIM}=150k\Omega$, $V_{SET}=NC$, $T_a=25^\circ C$, $C_{IN}=1\mu F$, ACF-Off mode, unless otherwise specified							
Carrier clock frequency	f_{PWM}			400		kHz	
Over current protection	I_{max}			6		A	
System Gain	A_v	External $R_{IN}=0\Omega$		27.4		dB	
Start-up time (power-on or shutdown release)	t_{STUP}			160		ms	
ACF attenuation gain	A_a		-18		0	dB	
Consumption current in shutdown mode	I_{SD}	CTRL= V_{SS}		0	1	μA	
Total Harmonic Distortion plus Noise	THD+N	$P_O=1.0W$, $R_L=4\Omega$, $f=1kHz$		0.1		%	
Output Noise	V_N	$f=20Hz\sim 20kHz$, A weighted, $A_v=27.4dB$		110		μV_{rms}	
Output offset voltage	V_{OS}			± 2		mV	
Quiescent current	I_{BAT}	LOAD=NC, BOOST=8.5V		40		mA	
Output Power	P_O	$R_L=2\times 4\Omega$	$V_{BAT}=4V$, $f=1kHz$, THD+N=10%		2x9		W
		$R_L=2\times 4\Omega$	$V_{BAT}=4V$, $f=1kHz$, THD+N=1%		2x7		
Efficiency (Class D + Boost)	η	$V_{BAT}=3.7V$, $R_L=4\Omega+22\mu H$, THD+N = 10%		70		%	

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit	
Class AB Channel ¹ $V_{SS}=0V$, $V_{BAT}=3.7V$, $C_{IN}=1\mu F$, $T_a=25^\circ C$, unless otherwise specified							
Output Power	P_O	$R_L=4\Omega$, $V_{BAT}=3.5V$	$f=1kHz$, THD+N=10%		1.25		W
		$R_L=4\Omega$, $V_{BAT}=4V$			1.7		W
		$R_L=4\Omega$, $V_{BAT}=5.0V$			2.76		W
		$R_L=4\Omega$, $V_{BAT}=3.5V$	$f=1kHz$, THD+N=1%		1.0		W
		$R_L=4\Omega$, $V_{BAT}=4V$			1.36		W
		$R_L=4\Omega$, $V_{BAT}=5.0V$			2.2		W
Total Harmonic Distortion plus Noise	THD+N	$P_O=0.01W$	$R_L=4\Omega$, $f=1kHz$		0.2		%
		$P_O=0.1W$			0.15		%
Output Noise	V_N	$f=20Hz\sim 20kHz$, A weighted, $A_v=21.4dB$		60		μV_{rms}	
Output offset voltage	V_{OS}			± 2		mV	
Efficiency	η	$R_L=4\Omega$, THD+N = 10%		70		%	
		$R_L=3\Omega$, THD+N = 10%		66		%	
System Gain	A_{V0}	External $R_{IN}=0\Omega$		21.4		dB	
Quiescent current	I_{BAT}			18		mA	
Start-up time (power-on, shutdown release, or switch between Class D and Class AB)	t_{STUP}			160		ms	

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
CTRL Terminal Voltage						



¹ In Class AB amplifier mode, boost converter is shutdown automatically. Due to the schottky rectifier, the voltage of PVDD terminal can be lower than VBAT, depending on the forward voltage of the rectifier V_F .


ACF Off (Class D, Adaptive boost enabled) mode setting threshold voltage	V _{MOD1}		2.4		5	V
ACF ON (Class D, adaptive boost enabled) mode setting threshold voltage	V _{MOD2}		1.5		2.1	V
ACF Off (Class AB, boost disabled) mode setting threshold voltage	V _{MOD4}		0.9		1.3	V
SD mode setting threshold voltage	V _{MOD5}		0		0.2	V
SD wake up voltage	V _{CTRL_ON}		0.9			V

TYPICAL OPERATING CHARACTERISTICS

Class D, VBAT = 3.7V, $f_{IN} = 1\text{kHz}$, BOOST=8.5V, Load = 4ohm, unless otherwise specified.



VDD vs IVDD

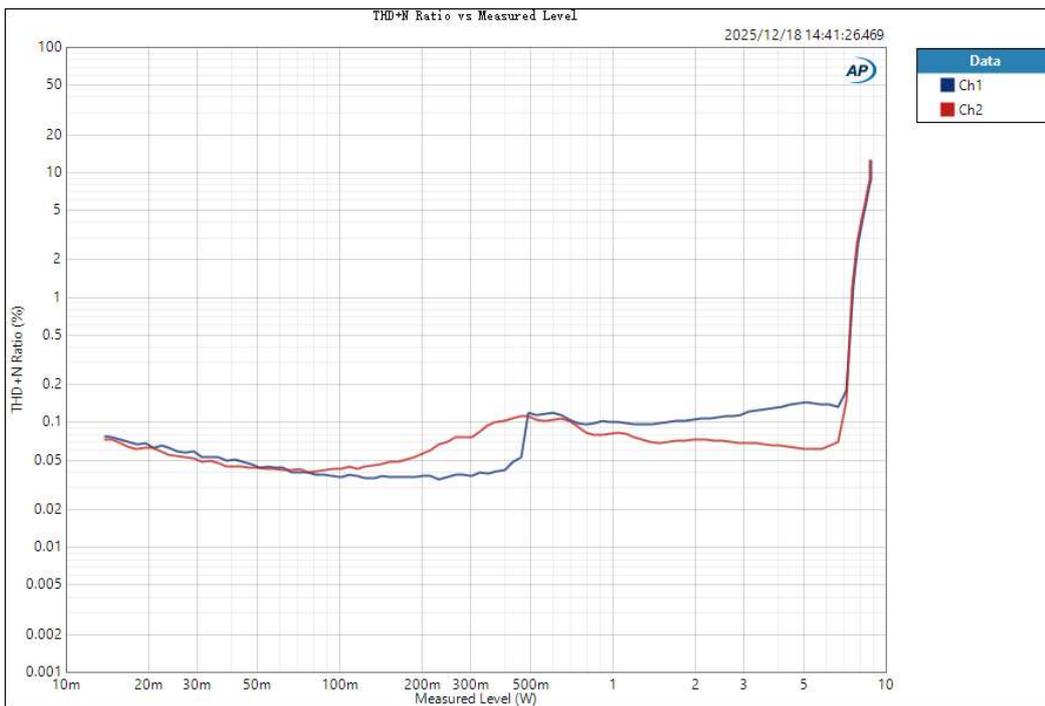
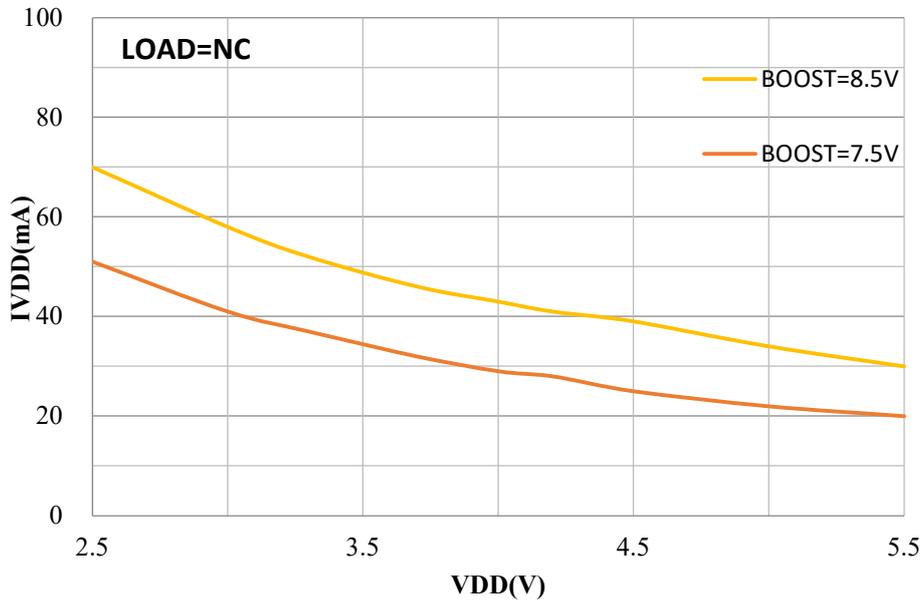


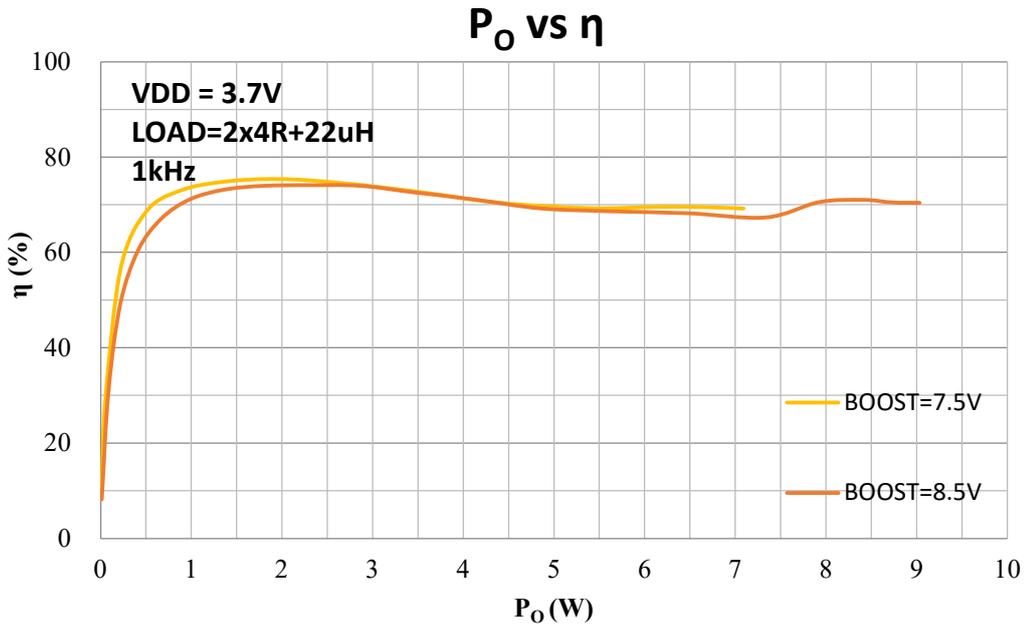


Class AB, V_{BAT} = 3.7V, f_{IN} = 1kHz, Load = 4ohm, unless otherwise specified.

V_{DD} vs I_{DD}

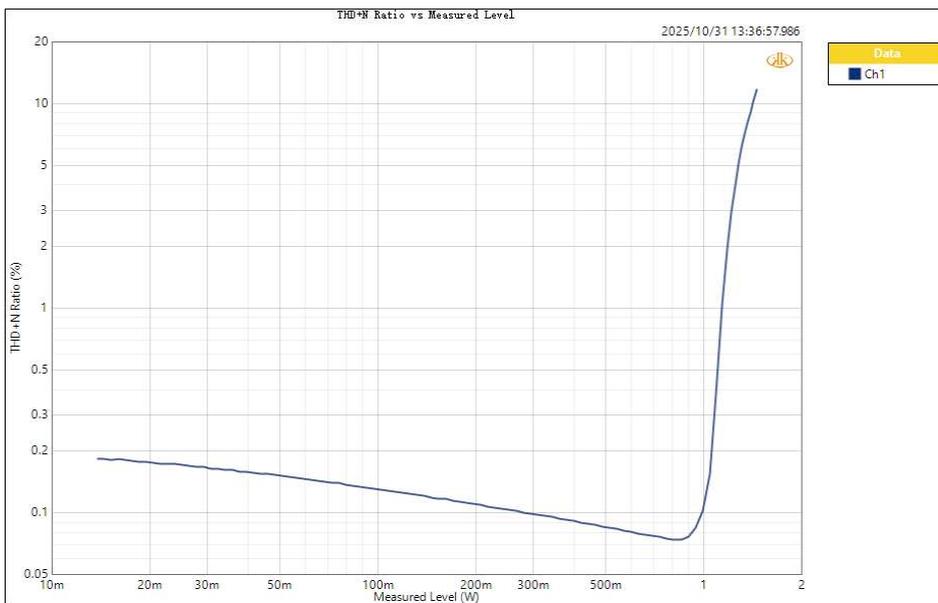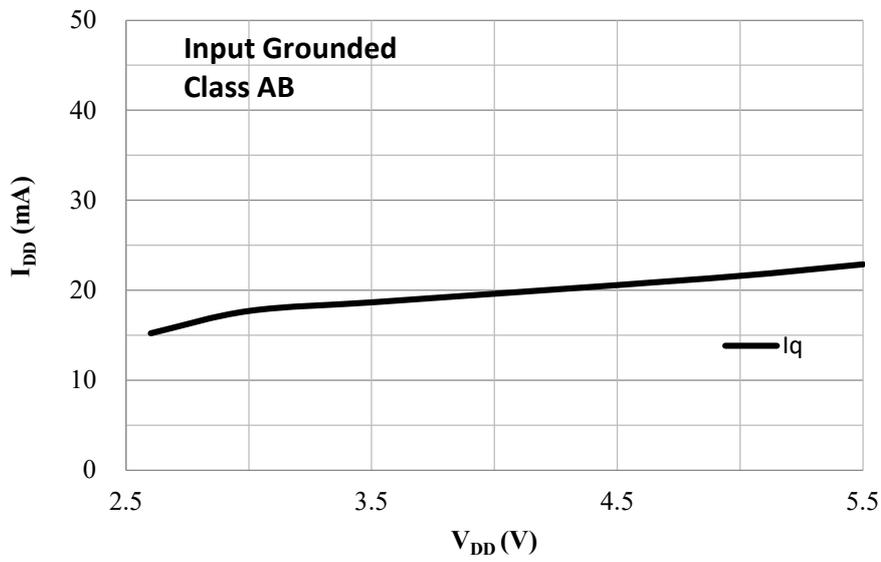


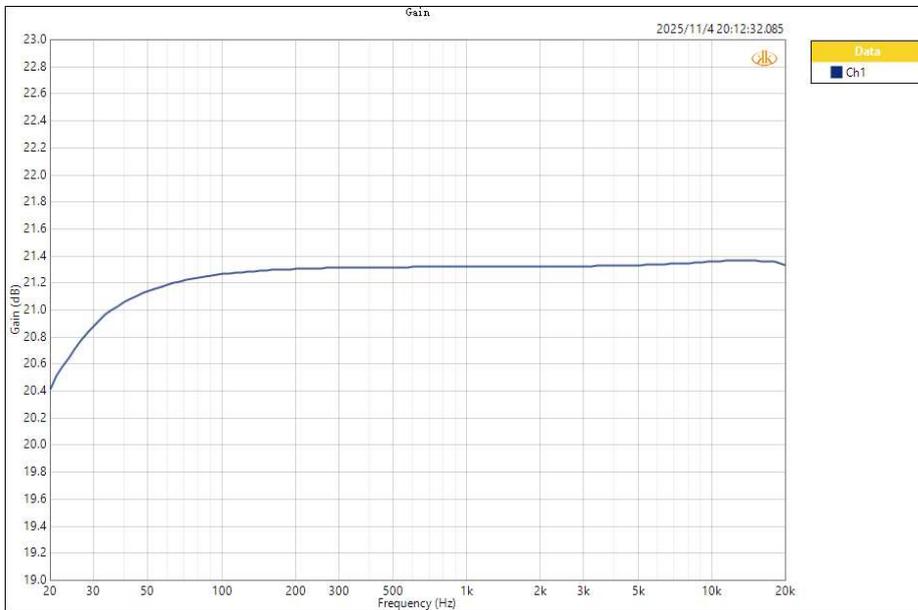
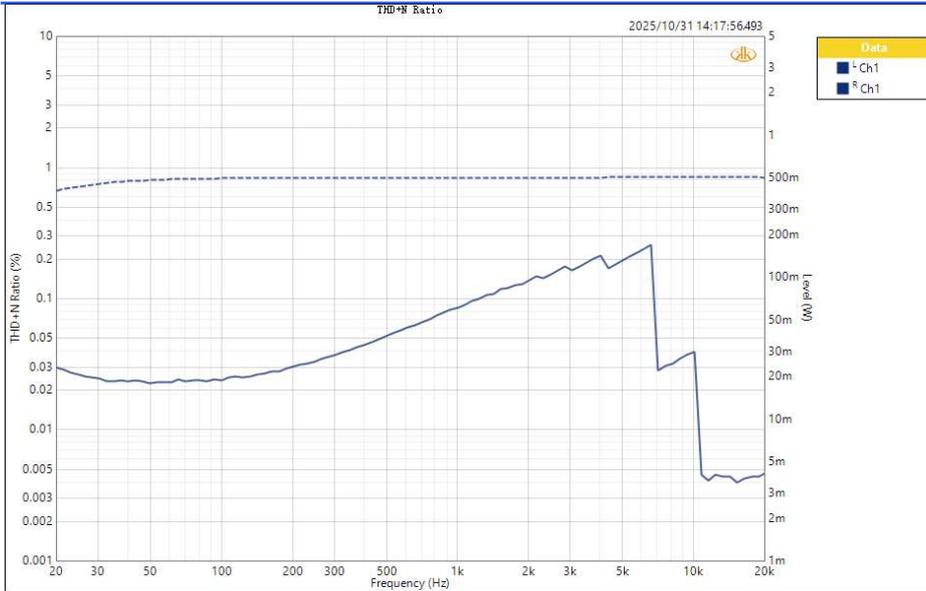


P_O vs η

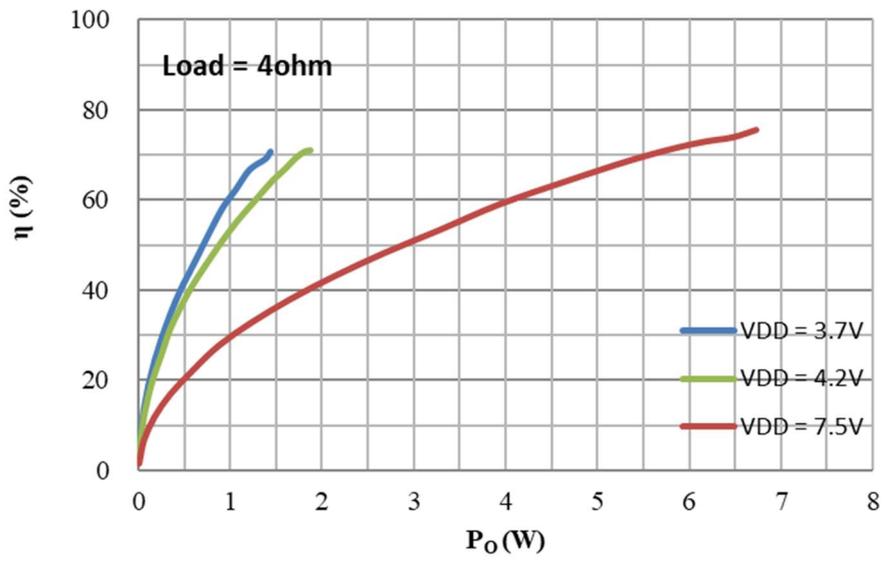


■ Revision History

Date	Version	Revision Content
2025-12-24	V1.0	First version.

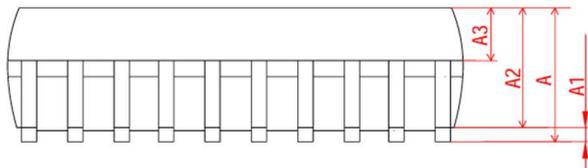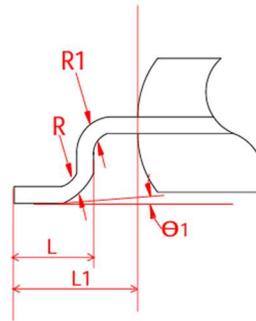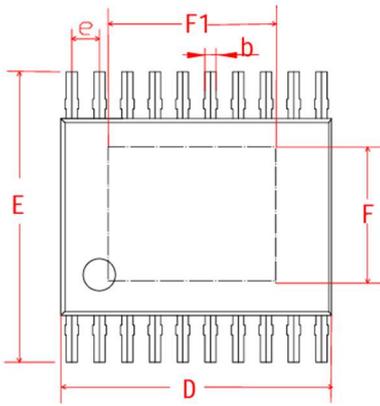PACKAGE OUTLINE


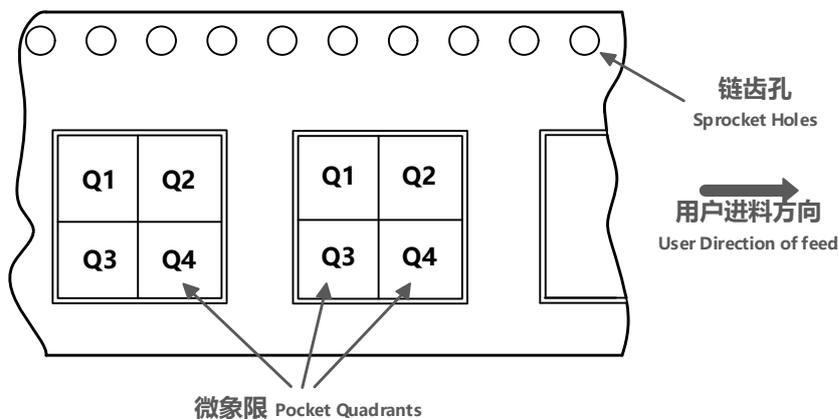
名称	尺寸		
	MIN	NOMINAL	MAX
A	1.0	-	1.10
A1	0.05	-	0.15
A2	0.90	0.95	1.0
A3	0.39	-	0.40
b	0.20	0.22	0.24
D	6.40	6.45	6.50
E	6.25	6.40	6.55
E1	-	4.35	4.40
L	0.50	0.60	0.70
e	0.65		
R	0.09		
L1	1.00REF		
Θ_1	0°	-	8°
F	2.99	1.00REF	3.0
F1	4.19	-	4.20

TAPE AND REEL INFORMATION

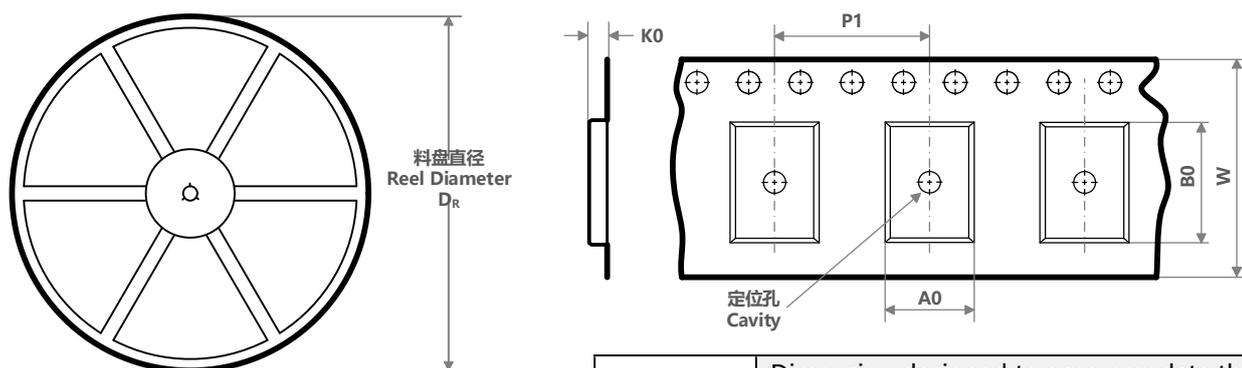


A0	Dimension designed to accommodate the component width; 料槽宽度
B0	Dimension designed to accommodate the component length; 料槽长度
K0	Dimension designed to accommodate the component thickness; 料槽厚度
W	Overall width of the carrier tape; 载带整体宽度
P1	Pitch between successive cavity centers; 相邻槽中心间距

编带 PIN1 方位象限分配
Quadrant Assignments for Pin1 Orientation in Tape



器件料号 Part No.	封装类型 Package Type	封装标识 Package Abbr.	引脚数 Pins	SPQ	料盘直径 Dr(mm)	料盘宽度 W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 象限 Quadrant
HTA8672MTER	ETSSOP	MTE	20	3000	330	16	6.65	6.8	1.5	8	16	Q1

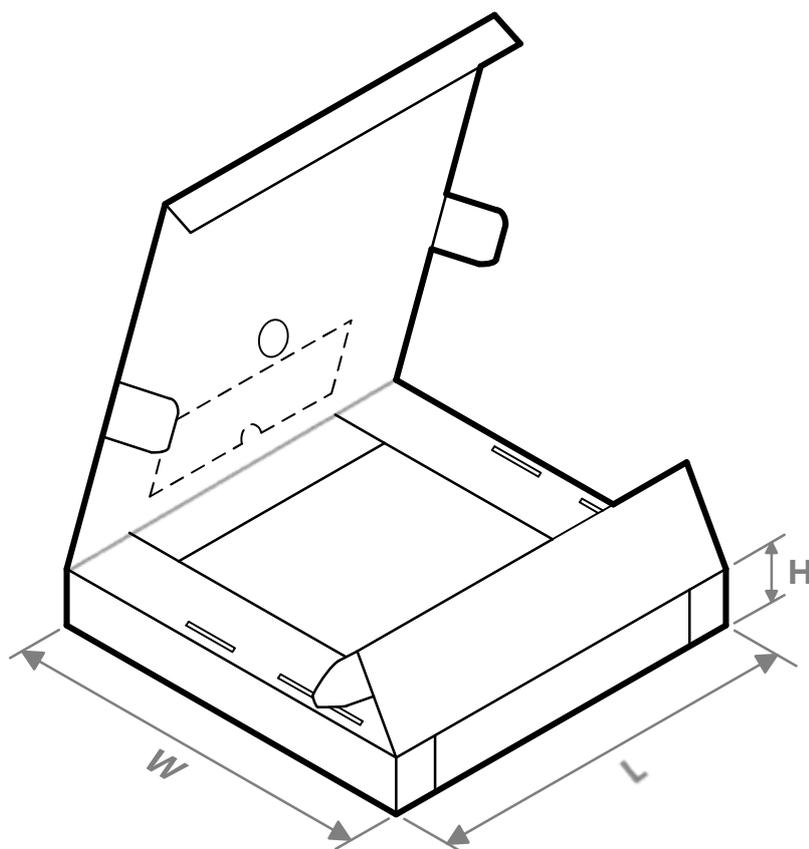

器件料号 Part No.	封装类型 Package Type	封装标识 Package Abbr.	引脚数 Pins	SPQ	长度 Length (mm)	宽度 Width (mm)	高度 Height (mm)
HTA8672MTER	ETSSOP	MTE	20	6000	390	345	55

IMPORTANT NOTICE**注意**

Heroic Electronic Technology (Jiaxing) Co., Ltd (HT) reserves the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any products or services. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete.

禾润电子科技（嘉兴）股份有限公司（以下简称HT）保留对产品、服务、文档的任何修改、更正、提高、改善和其他改变，或停止提供任何产品和服务的权利。客户在下单和生产前应确保所得到的信息是最新、最完整的。

HT assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using HT components.

HT对相关应用的说明和协助以及客户产品的板级设计不承担任何责任。

HT products are not authorized for use in safety-critical applications (such as life support devices or systems) where a failure of the HT product would reasonably be expected to affect the safety or effectiveness of that devices or systems.

HT的产品并未授权用于诸如生命维持设备等安全性极高的应用中。

The information included herein is believed to be accurate and reliable. However, HT assumes no responsibility for its use; nor for any infringement of patents or other rights of third parties which may result from its use.

本文中的相关信息是精确和可靠的，但HT并不对其负责，也不对任何可能的专利和第三方权利的侵害负责。

Following are URLs and contacts where you can obtain information or supports on any HT products and application solutions:

下面是可以联系到我公司的相关链接和联系方式：

禾润电子科技（嘉兴）股份有限公司**Heroic Electronic Technology (Jiaxing) Co., Ltd.**

地址：浙江省嘉兴市南湖区亚太路906号科创CBD园区21号楼11层

Add: 11th floor, Building 21, No. 906, Yatai Road, Jiaxing, Zhejiang Province

Sales: 0573-82586608, sales@heroic.com.cn

Support: 0573-82586151, support@heroic.com.cn

Website: www.heroic.com.cn; wap.heroic.com.cn

Wechat MP: HEROIC_JX

请及时关注禾润官方微信公众号，随时获取最新产品信息和技术资料！

